

MODELING NONCIRCULAR GEARS WITH COGAL SOFTWARE

ANDRÁS BENDEFY

Budapest University of Technology and Economics

ATTILA PIROS

Budapest University of Technology and Economics

Abstract: Nonlinear racks, noncircular gears and chain rings are special and rare machine parts. The rarity can be explained by the complicated evaluation process of these gears. This introduced project, a numerical method were determined and applied in a computer program, which makes this process easier and faster. The main concepts of the numerical method and the functionality of our software will be shortly presented through some special examples.

Keywords: gear, cogwheel, noncircular gear, nonlinear rack, cog profile.

Introduction

In most cases, general gears defined by basic parameter (module, cog count etc.) are manufactured by special machines [1, 2]. The complicated surfaces of the gears are automatically generated, thus no accurate model is needed. Gear modelling software modules integrated in CAD systems do not reproduce the accurate geometry, as they do not follow the principle of the shear cutting (see Figure 1). These modules serve mostly just to visualize the gears.

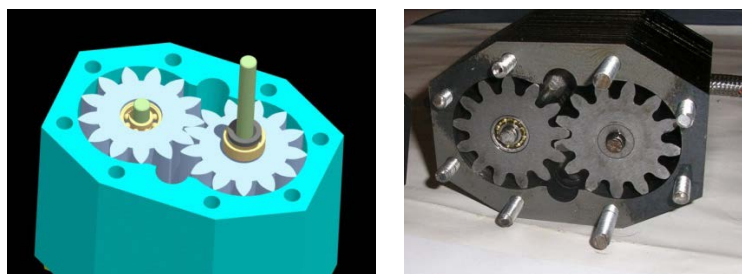


Figure 1. The illustration of gear pump CAD model and the manufactured gear

Recently various CNC technologies came to the front, which are suitable also to manufacture gears, like cutting with laser or water, wire-spark cutting, CNC milling, 3D printing [5]. Contrary to the traditional manufacturing methods, these modern technologies need a precise geometry of the cogwheel. Creating these geometric models of the noncircular gears is usually a slow and difficult process. These machine parts are very rare in the industrial usage, which does not mean that there is no need for them. In many cases, complex mechanisms can be replaced by a single pair of noncircular gear. The reason they are rare, is that their definition is complex and time consuming.

Our main goal was to create a fast and user-friendly software, which can generate a large variety of gear geometry, based on the simulation the rolling of the gears. The method is worked out to calculate noncircular gears, noncircular chain-rings or nonlinear racks (Figure 2 [7]) based on the function of transmission.

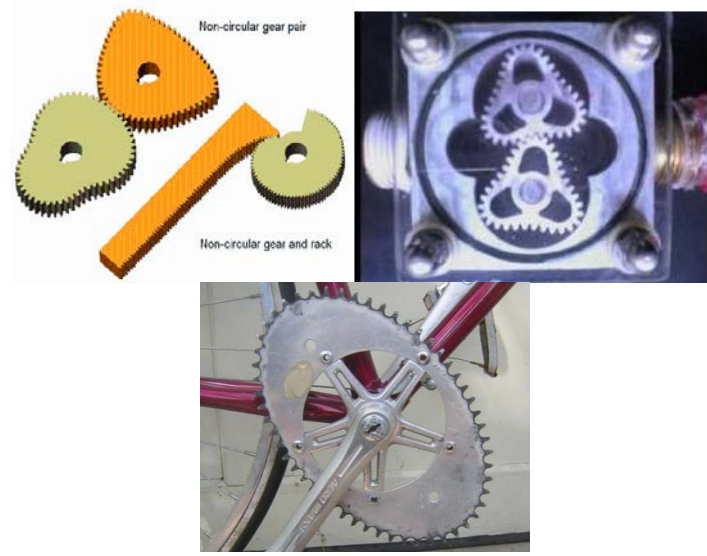


Figure 2. Non-circular gears, non-circular chain-ring and non-linear rack

A non-circular gear can be build up as follows. First, the cog profile must be defined, and then a circular tool-gear must be evaluated. This can be used to generate the non-circular gear after the main curve is defined based on the function of transmission. In the next sections, these methods are presented in details.

1.1. Rolling a line on a convex curve

The circular tool-gear can be generated by rolling a line (the rack) on a circle. Its generalized method is presented here. A steady x - y and a rolling ξ - η coordinate systems are defined. The f_p convex rolling curve is given in the x - y system. The rolling line is defined by the ξ axis on which the predefined f_q cog profiles placed.

$$X = X_p(p); \quad Y = Y_p(p) \quad \begin{bmatrix} X \\ Y \\ (Z) \end{bmatrix} = \begin{bmatrix} X_p(p) \\ Y_p(p) \\ 1 \end{bmatrix} = f_p(p) \quad (1.1)$$

$$\begin{aligned} \zeta = \zeta_q; \eta = \eta_q(q) + x_{pr} \end{aligned} \quad \begin{bmatrix} \zeta \\ \eta \\ (\zeta) \end{bmatrix} = \begin{bmatrix} \zeta_q(q) \\ \eta_q(q) + x_{pr} \\ 1 \end{bmatrix} = f_q(q) \quad (1.2)$$

In the (1.1), (1.2) equations the p and q are independent parameters, x_{pr} is the profile displacement.

The rolling is implemented by using finite numbers of transformations of the ξ - η coordinate system. The transformation can be divided into three steps (Figure 3):

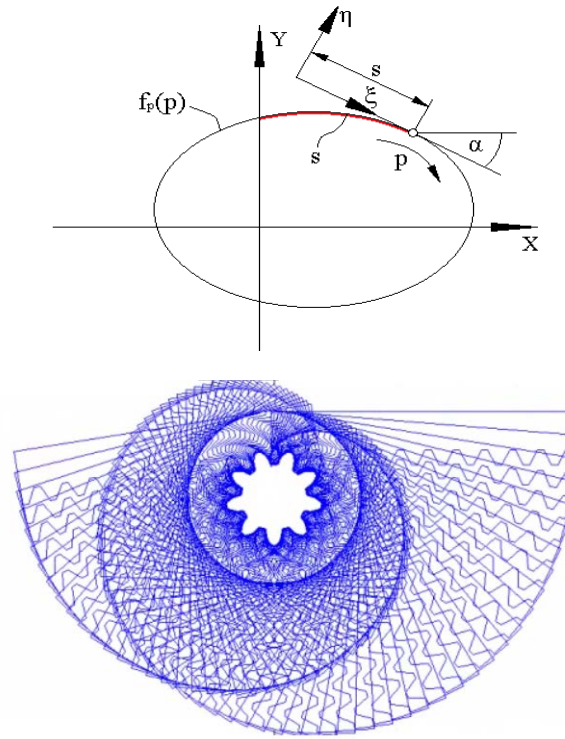


Figure 3. The steps of the transformation and the resultant set of lines

- Offset in the direction of axis ξ with $(-s)$, where s is the rolled length.
- Rotation with α around the centre of ξ - η , where α is the angle of the tangent in the current point.
- Offset of the centre of ξ - η into the current point.

$$s(p) = \int \sqrt{\left(\frac{\partial X_p(p)}{\partial p}\right)^2 + \left(\frac{\partial Y_p(p)}{\partial p}\right)^2} dp = \int_0^p \sqrt{\left|\frac{\partial f_p(l)}{\partial l}\right|} dl \quad (1.3)$$

$$\alpha(p) = \frac{\arctan\left(\frac{\partial Y_p(p)}{\partial p}\right)}{\frac{\partial X_p(p)}{\partial p}}. \quad (1.6)$$

These operations are achieved by the following expression.

$$\begin{aligned} E &= T_{xy} \left(T_\alpha \left(T_s f_q(q) \right) \right) = \\ &= \begin{bmatrix} 1 & 0 & X_p(p) \\ 0 & 1 & Y_p(p) \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos(\alpha(p)) & \sin(\alpha(p)) & 0 \\ -\sin(\alpha(p)) & \cos(\alpha(p)) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & -s(p) \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \xi_q(q) \\ \eta_q(q) + \chi_{pr} \\ 1 \end{bmatrix} \end{aligned} \quad (1.7)$$

For the numeric solution the p and q parameters are not continuous. The f_p and f_q represent the curves not as a function, but as an array of point coordinates.

The result of the transformations is a set of lines (Figure 3). The inside contour gives the geometry of the gear. The details of the contour finding algorithm are presented later [6].

1.2. Rolling a circle on an curve

The determined tool-gear can be used to generate *concave* gears as well. The radius of this circle cannot be larger than the smallest *concave* radius of the f_p rolling curve. The concept of the previous section are used, however, the transformation of the ξ – η system consist of two main steps (Figure 4):

- Rotation with $(\varphi = \alpha + \phi)$ around the centre of ξ – η , where α is the angle of the tangent in the current point and $\varphi(p) = s(p)/r$ is the angle of the rolling rotation of the tool-gear.
- Offset of the centre of ξ – η into an offset P_m point.

$$P_m = \begin{bmatrix} X_p(p) + (r + x_p) \cdot \sin(\alpha(p)) \\ Y_p(p) + (r + x_p) \cdot \cos(\alpha(p)) \end{bmatrix} \quad (1.8)$$

r is the radius of the rolling circle in ξ – η .

$$\begin{aligned} E &= T_{mxy} (T_{\alpha\varphi} f_q(q)) = \\ &= \begin{bmatrix} 1 & 0 & mX_p(p) \\ 0 & 1 & mY_p(p) \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos(\alpha(p) + \varphi(p)) & \sin(\alpha(p) + \varphi(p)) & 0 \\ -\sin(\alpha(p) + \varphi(p)) & \cos(\alpha(p) + \varphi(p)) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \xi_q(q) \\ \eta_q(q) \\ 1 \end{bmatrix} \end{aligned} \quad (1.9)$$

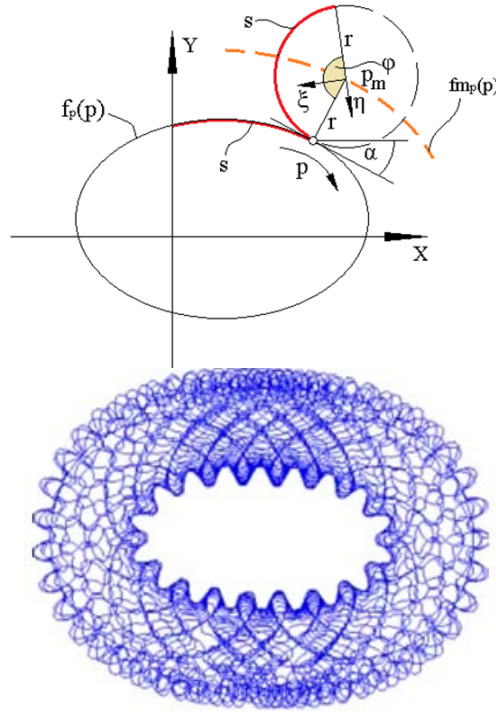


Figure 4. Steps of the rolling of the tool-gear on the rolling curve and the resultant set of lines

With these two methods we can place general cog-profile even on concave rolling curves. The generation of the rolling curves for a given function of transmission is presented in the next section [6].

1.3. Rolling curves

The rolling curves of a pair of noncircular gears which have fixed axis distance can be defined by the a axis distance, which is the sum of the working radii $a = r_1 + r_2$ and function of transmission, which is given by

$$i = \frac{\omega_1}{\omega_2} = \frac{\partial \varphi_1}{\partial \varphi_2}, \quad (1.10)$$

where ω_i is the angular velocity, φ_i is the angle position of the i^{th} gears. In

Figure 5. Figure 6. a) kinematic chain of the rolling of two non-circular gears is presented. The contact point is placed between the axes. The gears have the same velocity vector in this point, so:

$$r_1 \omega_1 = r_2 \omega_2. \quad (1.11)$$

Hence, the transmission can be defined by the working radii and/or the axis distance:

$$i = \frac{\omega_1}{\omega_2} = \frac{r_2}{r_1} = \frac{a - r_1}{r_1}. \quad (1.12)$$

Rearranging Eq (4.3), the first rolling curve in polar coordinate system can be define as

$$r_1(\varphi_1) = \frac{a}{i(\varphi_1) + 1} \quad (1.13)$$

and the rolling curve of the second gear can be defined as

$$r_2(\varphi_2(\varphi_1)) = r_1(\varphi_1)i(\varphi_1). \quad (1.14)$$

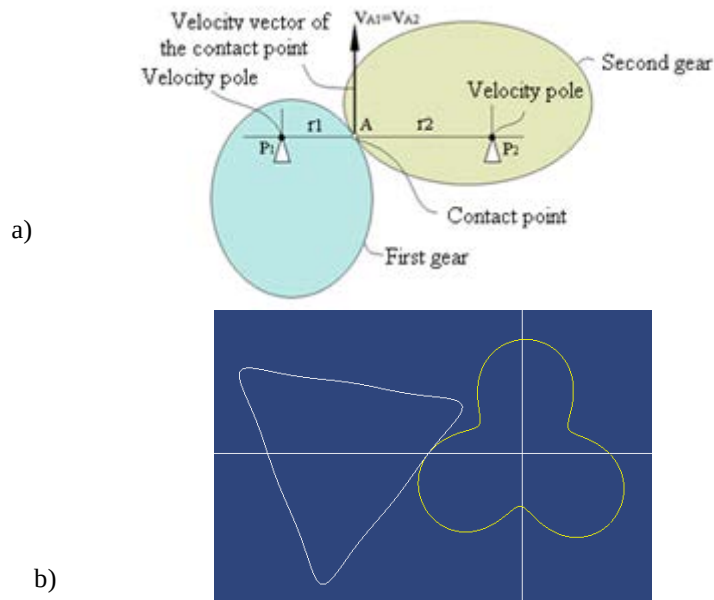


Figure 5. a) Sketch for the evaluation of the curves b) apairs of rolling curves

1.4. Standard cog profile

The analytic definition of the standard cog profile is a quite complicated issue. It contains six different curves with different equations (4 lines and 2 arcs) (Figure 6–7).

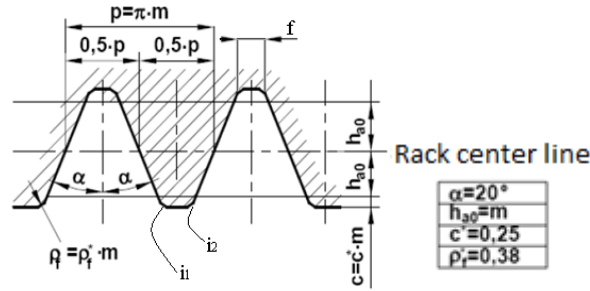


Figure 6. The standard tool rack of a circular cogwheel [5][8]

It is much easier to define just one single period of the profile and then with an algorithm we can make a pattern of it.

Each line entity is defined by two points. The arcs of the profile shape can also be defined by points with a given resolution, so it will contain more short lines.

$$M_p \begin{bmatrix} 0 & f & i_{1x}i_{2x} \\ h_{a0} + C & h_{a0} + C & i_{1y}i_{2y} \end{bmatrix}. \quad (1.15)$$

The i_{1x} , i_{1y} , i_{2x} and i_{2y} vectors have n (resolution) elements. These elements are produced by the $\mathbf{q}$ vector, which also have n elements. These elements are changing from 0 to 1 uniformly.

$$\mathbf{q} = [q(1) \ q(2) \ \dots q(i) \ \dots q(n)] \quad (1.16)$$

$$q(i) = \frac{i}{n} \quad (1.17)$$

$$i_{x1} = [i_{x1}(1) \ i_{x1}(2) \ \dots i_{x1}(i) \ \dots i_{x1}(n)] \quad (1.18)$$

The arcs (Figure 7) are defined by the (5.5–8) equations.

$$i_{1x}(i) = \rho_f \cdot \cos\left(\left(\frac{\pi}{2} - \alpha\right) \cdot q(i) - \pi + \alpha\right) + \frac{P}{2} + 1 \quad (1.19)$$

$$i_{1y}(i) = \rho_f \cdot \sin\left(\left(\frac{\pi}{2} - \alpha\right) \cdot q(i) - \pi + \alpha\right) - h_{a0} - C + \rho \quad (1.20)$$

$$i_{2x}(i) = \rho_f \cdot \cos\left(\left(\frac{\pi}{2} - \alpha\right) \cdot q(i) - \frac{\pi}{2}\right) + \frac{P}{2} + f - 1 \quad (1.21)$$

$$i_{2y}(i) = \rho_f \cdot \sin\left(\left(\frac{\pi}{2} - \alpha\right) \cdot q(i) - \frac{\pi}{2}\right) - ha_0 - C + \rho \quad (1.22)$$

$$f = \frac{P}{2} - 2 \cdot (ha_0 + C) \cdot \tan(\alpha) \quad (1.23)$$

$$l = \rho \cdot \tan(\beta) \quad (1.24)$$

$$\beta = \frac{\frac{\pi}{2} - \alpha}{2} \quad (1.25)$$

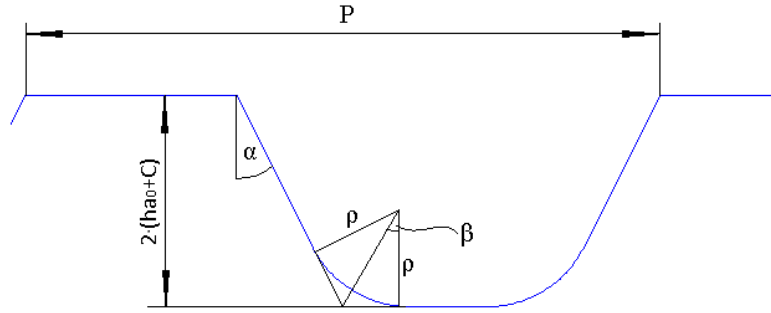


Figure 7. The sketch of the profile, used for the calculation

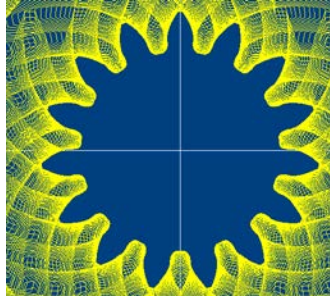


Figure 8. The standard profile rolled on a circle

1.5. Envelope finding

Based on the previous sections, a set of lines can be defined for a general concave non-linear gear (Figure 8). To get the final geometry, we need to find the inside envelope of these lines. Many methods have been developed, implemented and tested, and finally an image based method shows the best and fastest results [4]. The essence of this method is to draw every high resolution raster image of the lines using the graphics card. From this image we can obtain the contour, pixel by pixel very rapidly by using the GPU (Figure 9).

Some filtering methods are also applied on the final geometry. The resolution of the applied image can be adjusted to the given surface tolerance of the gear surface.

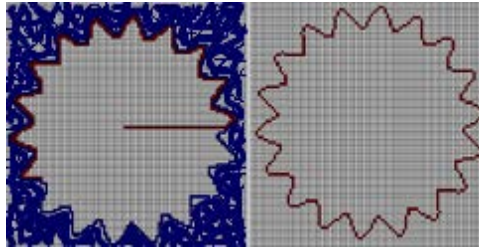


Figure 9. Image based contour finding presented in a very low resolution

1.6. The cogal application

For ease of the more convenient use, the previously reviewed computations were implemented in C# environment. The name of the software: CogAL, derived from “**Cog**wheel **g**enerator **al**gorithm”. Our goal was to create an easy-to-use application for circular and non-circular gears and non-linear racks (Figure 10). In the next subsections, the four separate functions of the program will be covered.




Figure 10. The menubar of the main functions

Generating a circular gear

This module can generate circular gears with multiple types of profiles. The standard profile can be defined with its main parameters (like module, contact angle etc.) (Figure 11). Aside from the standard trapezoid profile, it is possible to define sine, chain and custom profiles.

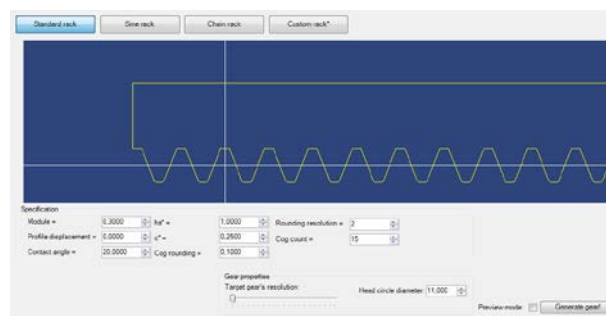


Figure 11. CogAl's circular gear generator module

Generating non-circular gear pair, with fixed axis distance

To generate this kind of gear pairs, three steps have to be taken. The first step is to define the rolling curves with their axis distance, and the angle positions pairs (see Figure 10 a). The angle positions can be defined by a function or by a CSV table.

In the next step, the profile has to be specified similarly to the *circular gear* section. When both the profile and the lines are available, a preview image of the final geometry will be generated (Figure 10 b).

In the final step the program will find the contour of the preview shape. The final geometry will be generated. This geometry is available for further usage, like exporting into standard CAD system format or a real-time rolling test of the final gears geometries can be performed to check the result (Figure 11).

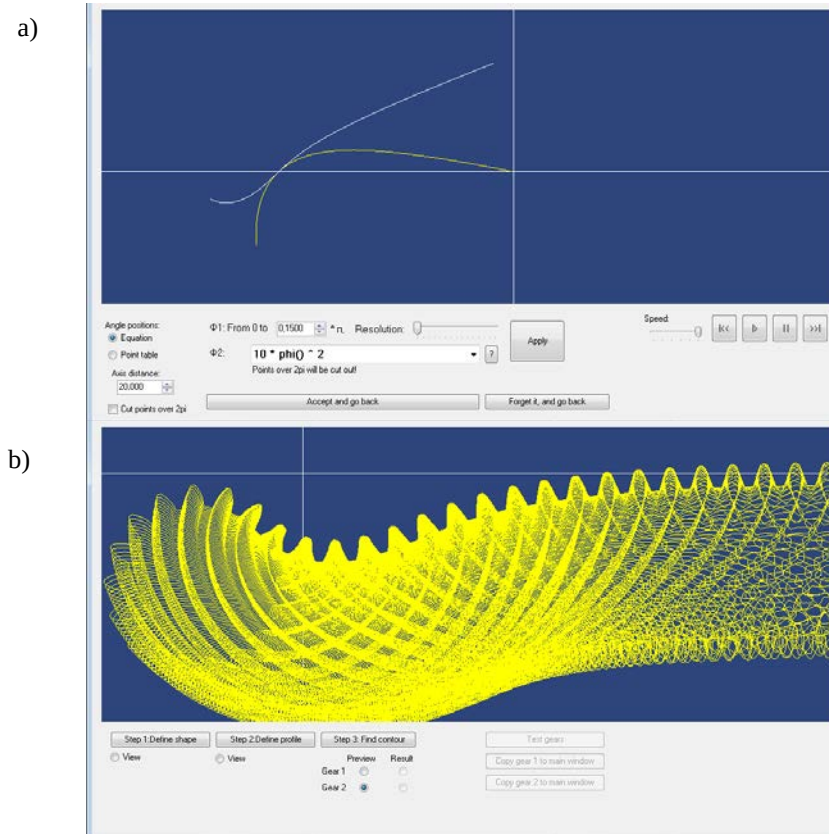


Figure 12. a) Generated the rolling curves in CogAl b) Preview of the final geometry

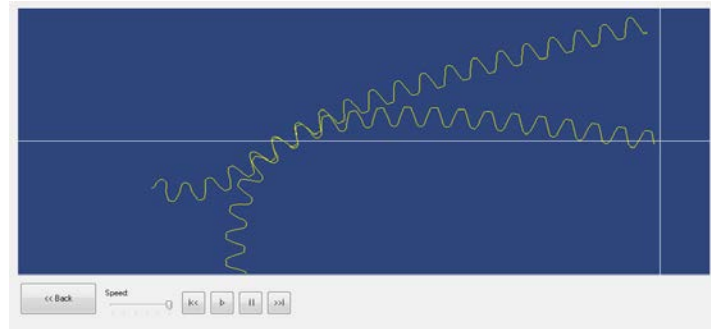


Figure 13. CogAl shows the final geometry of the non-circular gear pair

Generating non-circular gear-rack pair

The use of this module is similar in many aspects to the previously presented module. The main difference is in the first step, where the position of the rack is specified as a function of the angular position of the cog-wheel. In this case the transmission function has length units and there is no need to give an axis distance (as it theoretically would be infinite in each case) (Figure 14).

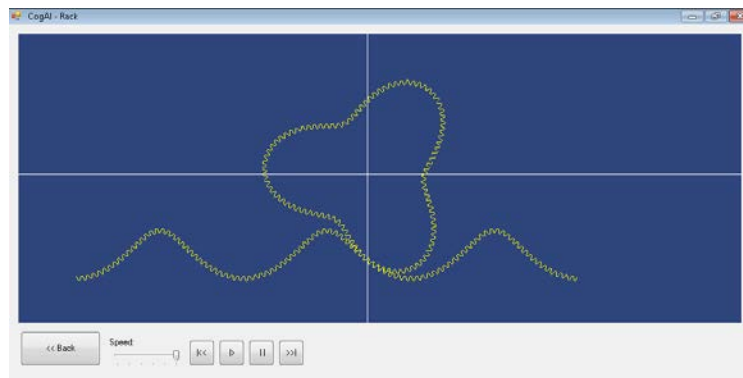


Figure 14. CogAl shows the final geometry of the non-linear gear-rack pair

Generating a single, non-circular gear with arbitrary rolling curve

This module can generate a non-circular gear with any kind of rolling curve, with standard, sine, chain or custom tooth profiles. The rolling curve can be defined with two parametric functions in Cartesian or polar coordinate systems, or by loading a CSV file that contains the coordinates (Figure 15).

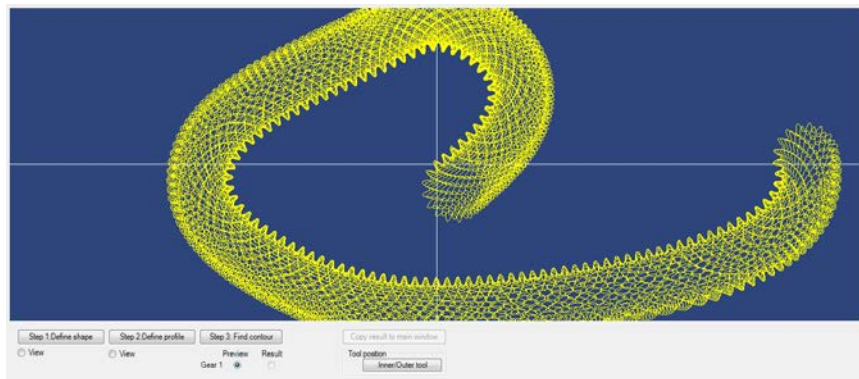


Figure 15. Generating a single gear with arbitrary curve by CogAI, using the curve of the gears shape

1.7. Examples

In this section some test applications are shown where the capability of the software and the validity of the results are shown.

In the first test, two gears with identical rolling curves were generated, which creates periodical pulsation in the transmission function. The functions of the angular positions were determined by sinusoidal functions [Figure 14 a)].

The second example shows a non-circular gear pair which compensates the angular velocity pulsation of a 45° cardan joint [Figure 14 b)].

In the next model we balanced a weight on the end of an arm, using a spring and special rack. The weights torque changes in the axis as we move the arm. The special rack and gear connection between the arm and spring equals the loads, so the weight is balanced in every position.

In the least example, a two-bar open kinematic chain is created, where the linear motion of the end point is guaranteed by non-circular gears, which crates the proper transmission function between angular positions of the bars [Figure 14 d)].

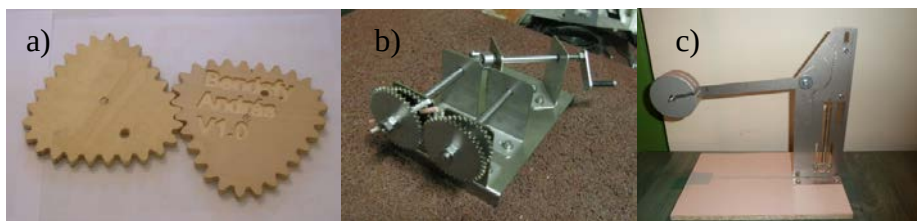


Figure 16. a) Gears for harmonically varying transmission. b) Eliminating the angular velocity pulsation of the cardan joint. c) Balancing a weight with spring and special rack



Figure 17. Open kinematic chain with linear motion of the free end

1.8. CONCLUSION

In this project a software was created which is able to generate general concave non-circular gears, based on a few parameters. The implemented numerical methods were analyzed and optimized to create a fast and reliable geometrical result of the generated cogwheel. A user friendly interface is created where only the main parameters are required and the additional computation is evaluated in the background. The efficiency of the software is represented thorough some engineering examples.

The program is still under development, but it is aimed that later it should be applicable individually, even integrated into CAD system.

1.9. References

1. F. L. Litvin: *A fogaskerékkapcsolódás elmélete*. Műszaki Könyvkiadó, Budapest, 1972.
2. Erney György: *Fogaskerekek*. Műszaki Könyvkiadó, Budapest, 1983.
3. Simon Vilmos: *Gépelemek 2*. Budapesti Műszaki és Gazdaságtudományi Egyetem, 2008.
4. Bach Iván: *Formális nyelvek*. Typotex, Budapest, 2002.
5. Fisher, U.: *Metal tables*. Haan-Gruiten: Verlag Europa-Lehrmittel, 1999.
6. Egerszegi János–Laczik Bálint: *Nem kör alakú fogaskerekek a fegyvertechnikában*. Zrínyi Miklós Nemzetvédelmi Egyetem Bolyai János Hadmérnöki Kar.
7. Laczik Bálint: *Cometarium-mechanizmus*. Fizikai szemle, 2008/2.

